



QUICK MAINTENANCE WITHOUT POWER INTERRUPTION

Easy switching to utility power during UPS maintenance


Designed for UPS systems, the Maintenance Bypass Switch (MBS) allows utility power to bypass the UPS, so that users can perform quick and safe maintenance without having to shut down power system and connected equipment. The product can be wall-mounted or rack-mounted to achieve flexible installation.

SERIES FEATURES

- Multiple Mounting Options
- Door Design to Improve Safety
- Metal Housing

PRODUCT CALLOUTS

1. Maintenance Breaker
2. Output Breaker
3. Bypass Breaker
4. Input Breaker
5. Maintenance Cover
6. Dry Contact Connectors
7. Inverter Mode Button

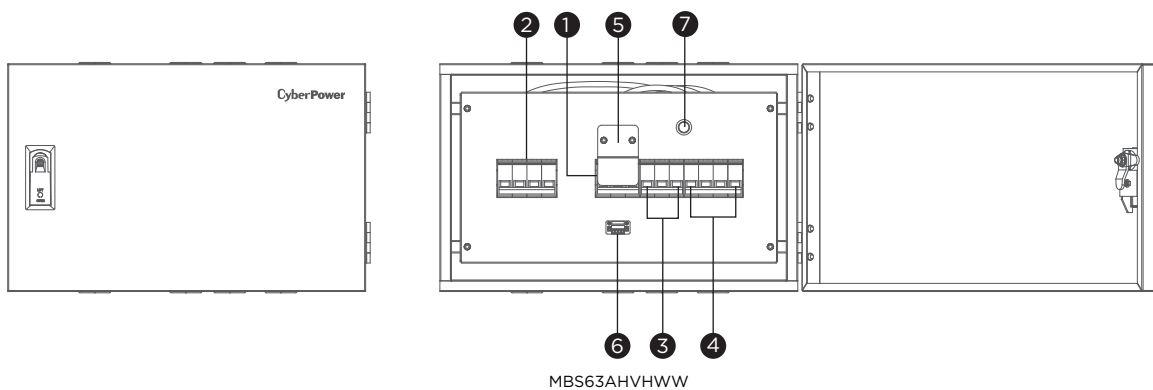

TECHNICAL SPECIFICATIONS

Model Name	MBS63AHVHWW
General	
Compatible Models	RT33010KE, RT33015KE, RT33020KE, RT33025KE, RT33030KE
Input	
Input Voltage Range (Vac)	380 - 415
Rated Input Current (A)	63
Physical	
Enclosure Construction	Metal
Color	Black
Installation	Horizontal Rackmount, Wallmount
Installation Attached to Rack/Tower UPSs	Yes
Physical Size	
Dimensions (WxHxD) (mm.)	440 x 280 x 110
Weight (kg.)	7.1
Shipping Dimensions	
Dimensions (WxHxD) (mm.)	570 x 204 x 360
Weight (kg.)	8.7
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 95
Operating Elevation	≤1000, Load Derated 1% per 100m from 1000m and 2000m
Storage Temperature (°C)	-40 - 70
Certifications	
Certifications*	CE
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.