

ENTRY-LEVEL POWER DISTRIBUTION

Provides reliable power distribution for connected equipment


Ideal for server room and IT applications, the Basic PDU Series is a power distribution device that delivers electricity from a single source to multiple devices. The products feature overload protection, external site ground pin, industrial-grade metal housing, adjustable mounting brackets, long input power cord, and cord retention tray.

SERIES FEATURES

- Overload Protection
- Industrial-grade Metal Housing
- Adjustable Mounting Brackets
- Cord Retention Tray

PRODUCT CALLOUTS

- 1 . AC Inlet
- 2 . Circuit Breaker
- 3 . External Site Ground
- 4 . Cord Retention Tray Screw Holes
- 5 . AC Outlets

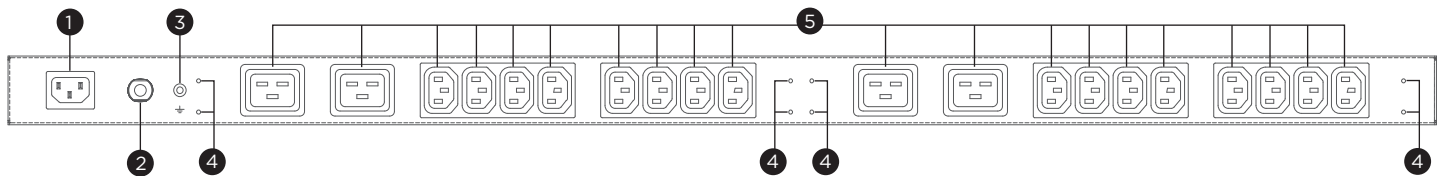

PDU10BVHVIEC20F



TECHNICAL SPECIFICATIONS

Model Name	PDU10BVHVIEC20F
Input	
Nominal Input Voltage (Vac)	200 - 240
Input Frequency (Hz)	50 / 60
Maximum Input Current (A)	10
Input Connector Type	IEC C14 x 1
Power Cord Length (m.)	3.05
Output	
Over Current Protection (Each Bank) (A)	10
Outlets - # of Bank(s) (Bank)	1
Outlet(s) - Total	20
Outlet(s) - Front	20
Outlet Type	IEC C19 x 4, IEC C13 x 16
Physical	
Installed Rack Height (U)	0
Cord Retention Tray	Yes
Physical Size	
Dimensions (WxHxD) (mm.)	44.5 x 914.4 x 38.1
Weight (kg.)	2
Environmental	
Operating Temperature (°C)	0 - 35
Operating Relative Humidity (Non-condensing) (%)	0 - 95
Certifications	
Certifications*	CE, ETL (test followed UL60950)
RoHS	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.