

MV-CL022-40GC

2048 P CMOS GigE Line Scan Camera



GEN*i*CAM

GigE
VISION


Introduction

MV-CL022-40GC camera supports line trigger mode, frame trigger mode, line + frame trigger mode, etc. It uses GigE interface to transmit non-compressed images in real time with max. line rate reaching 32 kHz.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay.
- Supports gain and exposure control, LUT, Gamma correction, etc.
- Compact design for flexible installation.
- Compatible with GigE Vision Protocol V2.0, GenCam Standard, and third-party software based on the protocol and standard.

Dimension

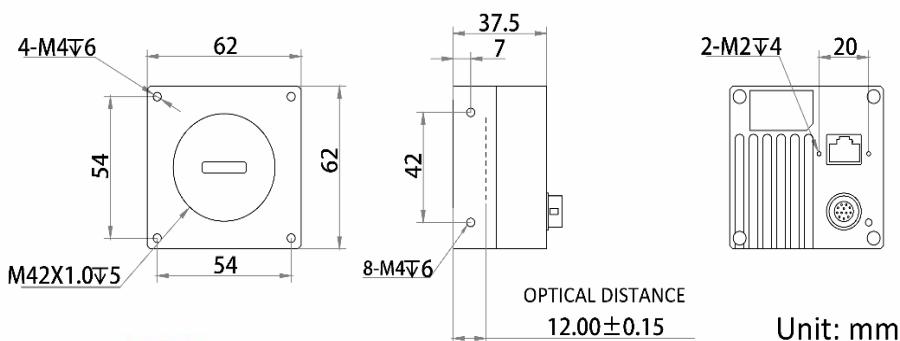


Available Model

MV-CL022-40GC

Applicable Industry

Printing, metallurgy, food, pharmaceutical, transportation, logistics, material sorting, etc.

Sensor Quantum Efficiency

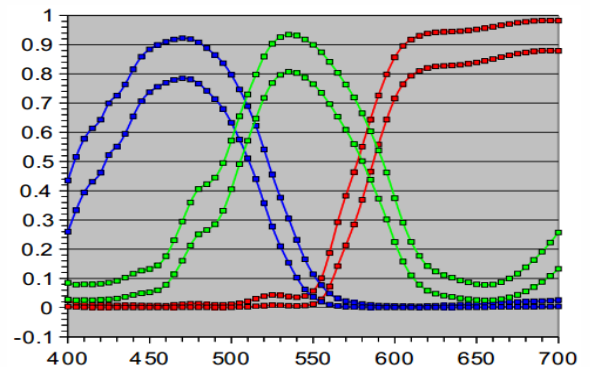

Specification

Model	MV-CL022-40GC
Camera	
Sensor type	CMOS
Pixel size	7 μm
Resolution	2048 \times 2
Max. line rate	32 kHz@ Bayer 8/Bayer 10p/Bayer 12p/ Mono 8 28 kHz@Bayer 10/Bayer 12/YUV 422 Packed/YUV 422 (YUYV) Packed/Mono 10/Mono 12 18 kHz@RGB 8/BGR 8
Dynamic range	60 dB
SNR	40 dB
Gain	0 dB to 7.9 dB
Exposure time	2 μs to 10 ms
Exposure mode	Off/Once/Continuous exposure mode, and supports trigger-width exposure
Mono/color	Color
Pixel format	Mono 8/10/12, Bayer RG 8/10/10p/12/12p, YUV 422 Packed, YUV 422 (YUYV) Packed, RGB 8, BGR 8
Binning	Not supported
Reverse image	Supports horizontal reverse image output
Trigger mode	External trigger, internal trigger
External trigger mode	Line trigger, frame trigger, line + frame trigger
Electrical feature	
Data interface	Gigabit Ethernet, compatible with Fast Ethernet
Digital I/O	12-pin Hirose connector provides power and I/O, including differential input \times 2 (Line 0, Line 3), differential output \times 2 (Line 1, Line 4), and bi-directional non-isolated I/O \times 1 (Line 2)
Power supply	12 VDC, supports PoE
Power consumption	Typ. 4 W@12 VDC
Mechanical	
Lens mount	M42*1, optical back focal length: 12 mm (0.5"), applicable to F-mount, C-mount and lens of other types via lens adapter
Dimension	62 mm \times 62 mm \times 37.5 mm (2.4" \times 2.4" \times 1.5")
Weight	Approx. 170 g (0.4 lb.)
Ingress protection	IP40 (under proper lens installation and wiring)
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)
Humidity	20% to 80% RH, non-condensing
General	
Client software	MVS or third-party software meeting with GigE Vision Protocol
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS
Compatibility	GigE Vision V2.0, GenICam
Certification	CE, FCC, RoHS, KC

Distribution Partner:



**SCORPION
VISION**