

MV-CE050-31GM/GC

5 MP 1/2.5" CMOS GigE Area Scan Camera



GEN*i*CAM

GIG*E*
VISION

Introduction

MV-CE050-31GM/GC camera adopts Aptina AR0521 sensor to provide high-quality image. It uses GigE interface to transmit non-compressed images in real time with max. frame rate reaching 24 fps in full resolution.

Key Feature

- Adopts GigE interface and max. transmission distance of 100 meters without relay
- Up to 128 MB local memory for burst transmission and retransmission
- Supports auto exposure control, LUT, Gamma correction, etc.
- Supports hardware trigger, software trigger, etc.
- Compatible with GigE Vision V2.0 Protocol, GenICam Standard, and third-party software based on the protocol and standard


Available Model

Mono camera: MV-CE050-31GM
Color camera: MV-CE050-31GC


Applicable Industry

Electronic semiconductor, factory automation, logistics code reading, medical packing, quality inspection, etc.

Sensor Quantum Efficiency




MV-CE050-31GM



MV-CE050-31GC

Dimension

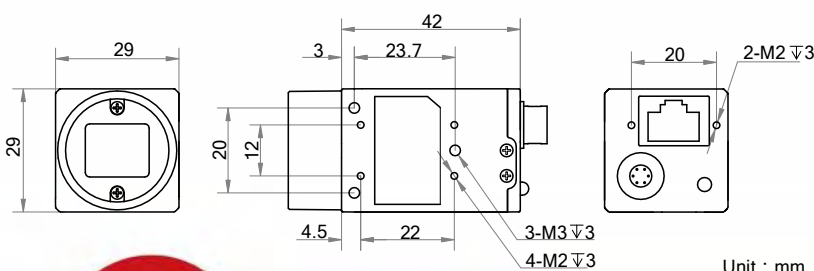

Specification

Model	MV-CE050-31GM	MV-CE050-31GC
Camera		
Sensor type	CMOS, rolling shutter	
Sensor model	Aptina AR0521	
Pixel size	2.2 μm \times 2.2 μm	
Sensor size	1/2.5"	
Resolution	2592 \times 1944	
Max. frame rate	24 fps @2592 \times 1944	
Dynamic range	63 dB	
SNR	37 dB	
Gain	0 dB to 23 dB	
Exposure time	21 μs to 1 s	
Shutter mode	Off/Once/Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, RGB 8, BGR 8, Bayer GB 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed
Binning	Supports 2 \times 2, 4 \times 4	
Decimation	Supports 2 \times 2, 4 \times 4	
Reverse image	Supports horizontal and vertical reverse image output	
Image buffer	128 MB	
Electrical features		
Data interface	Gigabit Ethernet interface	
Digital I/O	6-pin Hirose connector provides power and I/O, including Opto-isolated input x 1 (Line 0), opto-isolated output x 1 (Line 1), and bi-directional non-isolated I/O x 1 (Line 2).	
Power supply	9 VDC to 24 VDC, supports PoE	
Power consumption	Approx. 2.4 W@12 VDC	
Structure		
Lens mount	C-Mount	
Dimension	29 mm \times 29 mm \times 42 mm (1.1" \times 1.1" \times 1.7")	
Weight	Approx. 68 g (0.15 lb.)	
Ingress protection	IP30 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)	
Humidity	20% to 80% RH, without condensation	
General		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, FCC, RoHS, KC	

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

MaxxVision[®]

Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.