

BU725E

BU Series

Fire-Resistant UPS with The Most Durable Capability For Protection



- | | | |
|-----------------|----------------------|---------------------------|
| AVR | Generator Compatible | Flexible Placement |
| Fire-Resistance | Configurable Alarm | Auto-Restart/ Auto-Charge |

Featuring with the best-in-class fireproof plastic housing, the BU series UPS provides an outstanding fire-resistance capability to minimize the possible damages of valuable assets in case of any fire incident. With CyberPower's innovative Battery Management Technology, it significantly increases the battery efficiency therefore a longer battery life. The configurable alarm allows users to switch ON/OFF the audible alarm when UPS is on battery mode to avoid any disturbance. Its generator compatibility provides an extensive application scenario during power outage.

With the built-in Automatic Voltage Regulation (AVR) stabilizes the AC signal and maintains a safe voltage, it allows the UPS to maintain safe power levels through Boost & Buck function for the connected equipment without resorting to battery power.


APPLICATIONS

- Home and Home Office
- Home Theater System
- Small Office

SERIES FEATURES

- Automatic Voltage Regulation (AVR)
- Auto-Restart/Auto-Charge
- Generator Compatible
- Fire-Resistance Capability
- Configurable Alarm
- Battery Management Technology
- Flexible Placement

BU725E

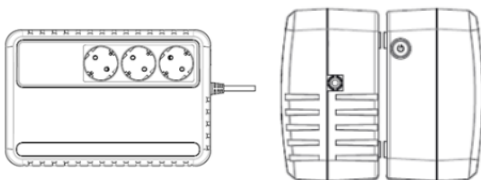

FRONT

SIDE



Automatic Voltage Regulation

Automatic Voltage Regulation provides clean, consistent AC power by automatically regulating low voltages and over voltages, within defined tolerances, when incoming utility power has minor fluctuations.



Fire-Resistant Capability

CyberPower adopts the best-in-class fireproof plastics in the industry, the outstanding fire-resistant capability minimize the possible damage of your valuable assets in case of any fire incident.

TECHNICAL SPECIFICATION

Model Name	BU725E-RU
General	
UPS Topology	Line-Interactive
Input	
Voltage	220/230/240Vac
Input Voltage Range	165Vac - 280Vac
Input Frequency Range	45-65Hz
Rated Input current	3.3A
Plug Type	Schuko
Output	
VA	725
Watts	360
On Battery Waveform	Simulated Sine Wave
On Battery Voltage	220/230/240Vac±10%
Automatic Voltage Regulation (AVR)	Single Boost/Single Buck
On Battery Frequency	50/60Hz ± 1%
Outlets - Total	3
Outlet Type	Schuko
Outlets - Battery & Surge Protected	3
Transfer Time	4ms Typical
Battery	
Runtime at 60W (min)	30
Runtime at 90W (min)	18
Battery Type	Sealed Lead Acid
Battery Quantity	1
Typical Recharge Time	8 Hours
Replacement Battery Pack	RBPO043
Replacement Battery Pack Quantity	1
Surge Protection & Filtering	
Surge Suppression	125J
Management & Communications	
LED Indicators	Power On, Using Battery
Audible Alarms	On Battery, Low Battery, Overload, Fault
Physical	
Form Factor	Brick
Physical - UPS Module	
Dimensions (WxHxD) (mm.)	158 x 91.5 x 240
Weight (kg.)	3.8
Environmental	
Operating Temperature	+ 32°F to 104° F / 0° C to 40° C
Operating Humidity	0% - 90% non-condensing
Operating Elevation	0-3000 meters
Storage Temperature	- 4°F to 122° F / -20° C to 50° C
Storage Relative Humidity	0% - 90%
Online Thermal Dissipation	40BTU/hr

#All specifications are subject to change without notice. ©2015 CyberPower Systems. All Trademarks are the property of their owners.

