

MV-CE120-10UM/UC

12 MP 1/1.7" CMOS USB3.0 Area Scan Camera



GEN*i*CAM

USBTM
VISION

Introduction

MV-CE120-10UM/UC camera adopts Sony® IMX226 sensor to provide high-quality image. It uses USB3.0 interface to transmit non-compressed images in real time with max. frame rate reaching 30 fps in full resolution.

Key Feature

- Supports auto and manual adjustment for gain, exposure control, white balance, LUT, Gamma correction, etc.
- Supports hardware trigger, software trigger, etc.
- Supports Off, Once, Continuous exposure mode.
- Compatible with USB3 Vision Protocol, GeniCam Standard, and the third-party software based on the protocol and standard.


Available Model

- Mono Camera: MV-CE120-10UM
- Color Camera: MV-CE120-10UC


Applicable Industry

SMT/ PCB AOI, FPD, etc.

Sensor Quantum Efficiency




MV-CE120-10UM



MV-CE120-10UC

Dimension

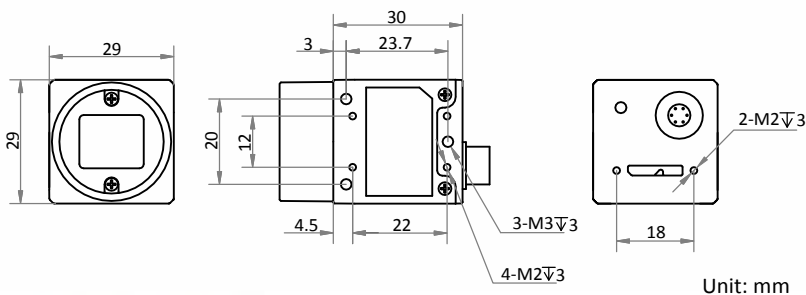

Specification

Model	MV-CE120-10UM	MV-CE120-10UC
Camera		
Sensor type	Rolling shutter CMOS	
Sensor model	Sony IMX226	
Pixel size	1.85 μm \times 1.85 μm	
Sensor size	1/1.7"	
Resolution	4000 \times 3036	
Max. frame rate	30 fps@4000 \times 3036	
Dynamic range	70.5 dB	
SNR	40.5 dB	
Gain	0 dB to 27 dB	
Exposure time	10 μs to 500 ms	
Shutter mode	Off/Once/Continuous exposure mode, supports global reset	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10p/12/12p	Mono 8/10/12, RGB 8, BGR 8, Bayer RG 8/10/10p/12/12p, YUV422Packed, YUV422_YUYV_Packed
Binning	Supports 2 \times 2, 4 \times 4	Not support
Decimation	Supports 2 \times 2, 4 \times 4	Not support
Reverse image	Supports horizontal and vertical reverse image output	
Image buffer	128 MB	
Electrical features		
Data interface	USB3.0	
Digital I/O	6-pin Hirose connector provides power and I/O, including Opto-isolated input x 1 (Line 0), Opto-isolated output x 1 (Line 1), bi-directional non-isolated I/O x 1 (Line 2).	
Power supply	9 VDC to 24 VDC, USB3.0 power supply	
Power consumption	< 3.18 W@12 VDC	< 3.42 W@12 VDC
Structure		
Lens mount	C-Mount	
Dimension	29 mm \times 29 mm \times 30 mm (1.1" \times 1.1" \times 1.2")	
Weight	Approx. 80 g (0.2 lb.)	
Ingress protection	IP30 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$)	
Humidity	20% to 80% RH, without condensation	
General		
Client software	MVS or third-party software meeting with USB3 Vision Protocol	
Operating system	32/64-bit Windows XP/7/10, 32/64-bit Linux and 64-bit MacOS	
Compatibility	USB3 Vision, GenICam	
Certification	CE, FCC, RoHS, KC	

HIKROBOT

Hangzhou Hikrobot Technology Co., Ltd.
No.399 Danfeng Road, Binjiang District, Hangzhou 310051, China.
en.hikrobotics.com

MaxxVision[®]
Sigmaringer Str. 121
70567 Stuttgart
Tel.: 0711 997 996 3
www.maxxvision.com

Copyright Hikrobot

Hangzhou Hikrobot Technology Co., Ltd. All Rights Reserved. Hangzhou Hikrobot Technology does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.