

# MV-CH650-90XM/XC

65 MP CMOS CoaXPress Area Scan Camera



**GEN<i>i</i>CAM**

## Introduction


MV-CH650-90XM/XC camera adopts Gpixel GMAX3265 sensor and CXP-6 interface to provide high-quality and non-compressed images in real time. Its max. frame rate reaches up to 31.5 fps in full resolution.

## Key Feature

- Resolution of 9344 × 7000, and pixel size of 3.2 μm × 3.2 μm.
- Adopts global shutter CMOS to provide high dynamic range, SNR, and high-quality image.
- Adopts CXP-6 interface to transmit data.
- Supports Off, Once, and Continuous exposure mode.
- Compatible with CoaXPress Protocol, GenICam Standard, and third-party software based on the protocol and standard.

## Dimension

F-mount with fan:

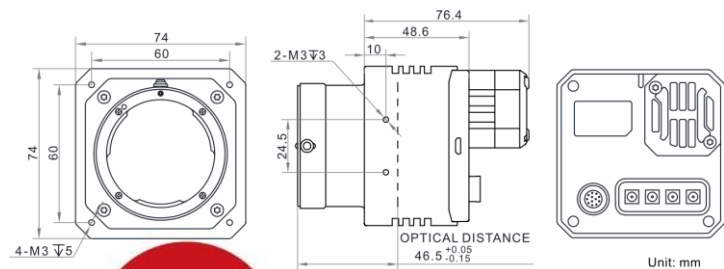


## Available Model

- M58-mount with fan, mono: MV-CH650-90XM-M58S-NF
- F-mount with fan, mono: MV-CH650-90XM-F-NF
- M58-mount with fan, color: MV-CH650-90XC-M58S-NF
- F-mount with fan, color: MV-CH650-90XC-F-NF


## Applicable Industry

PCB AOI, FPD, high-accuracy measurement, etc.

## Sensor Quantum Efficiency

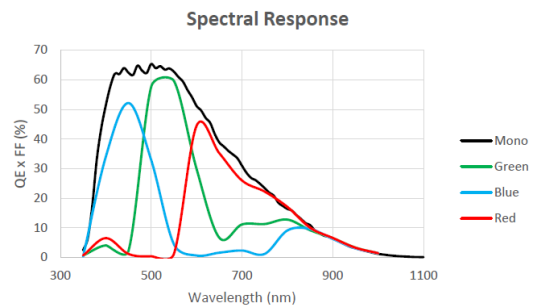

M58-mount with fan:

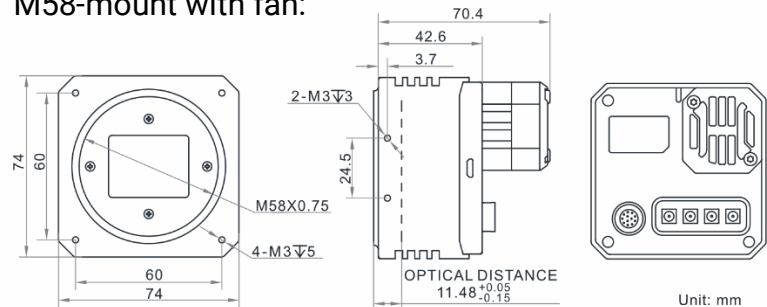

# Specification

Model	MV-CH650-90XM	MV-CH650-90XC
<b>Camera</b>		
Sensor type	CMOS, global shutter	
Sensor model	Gpixel GMAX3265	
Pixel size	3.2 $\mu\text{m}$ $\times$ 3.2 $\mu\text{m}$	
Sensor size	29.9 mm $\times$ 22.4 mm	
Resolution	9344 $\times$ 7000	
Max. frame rate	31.5 fps @9344 $\times$ 7000	
Dynamic range	66 dB	
SNR	40 dB	
Gain	1.25x to 6x	
Exposure time	14 $\mu\text{s}$ to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/color	Mono	Color
Pixel format	Mono 8/10/12	Bayer BG 8/10/12
Binning	Supports 1 $\times$ 1, 1 $\times$ 2, 1 $\times$ 4, 2 $\times$ 1, 2 $\times$ 2, 2 $\times$ 4, 4 $\times$ 1, 4 $\times$ 2, 4 $\times$ 4	
Decimation	Supports 1 $\times$ 1, 1 $\times$ 2, 1 $\times$ 4, 2 $\times$ 1, 2 $\times$ 2, 2 $\times$ 4, 4 $\times$ 1, 4 $\times$ 2, 4 $\times$ 4	
Reverse image	Supports horizontal and vertical reverse image output	
<b>Electrical features</b>		
Data interface	CoaXPress with DIN interface	
Digital I/O	12-pin P10 connector provides I/O: opto-isolated input $\times$ 1 (Line 0), opto-isolated output $\times$ 1 (Line 1), bi-directional non-isolated I/O $\times$ 1 (Line 2), and RS-232 $\times$ 1.	
Power supply	24 VDC	
Power consumption	Typ. 10.5 W@24 VDC	Typ. 10.2 W@24 VDC
<b>Mechanical</b>		
Lens mount	M58-mount: optical back focal length: 11.48 mm (0.5") F-mount: optical back focal length: 46.5 mm (1.8")	
Dimension	M58-mount with fan: 74 mm $\times$ 74 mm $\times$ 70.4 mm (2.9" $\times$ 2.9" $\times$ 2.8") F-mount with fan: 74 mm $\times$ 74 mm $\times$ 76.4 mm (2.9" $\times$ 2.9" $\times$ 3.0")	
Weight	M58-mount with fan: approx. 470 g (1.0 lb.) F-mount with fan: approx. 500 g (1.1 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$ ) Storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$ )	
Humidity	20% to 95% RH, non-condensing	
<b>General</b>		
Client software	Frame grabber software meeting with CoaXPress Protocol	
Operating system	32/64-bit Windows 7/10 with 8 GB memory or above	
Compatibility	CoaXPress, GenICam	
Certifications	CE, FCC, RoHS, KC	

Distribution Partner:



# SCORPION VISION