
EXTENDED BATTERY MODULE SERIES

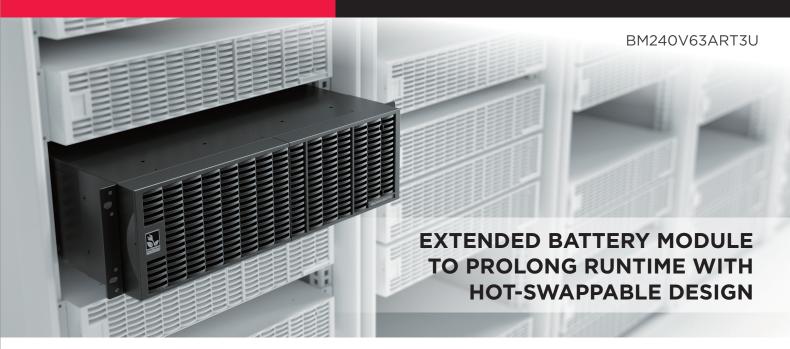

The battery module allows users to perform battery maintenance without interruption

Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The products feature hot-swappable battery packs, allowing users to safely remove and replace battery packs without affecting connected loads.

SERIES FEATURES


- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries

- Hot-swappable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1. On-board Replaceable Fuse Cover
- 2. Input Connector

- 3. Output Cable
- 4 . DC Breaker

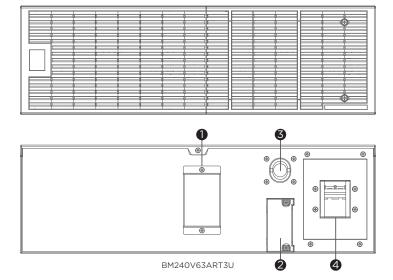

TECHNICAL SPECIFICATIONS

Model Name	BM240V63ART3U
General	
Nominal Output Voltage (Vdc)	240
Rated Output Current (A)	63
Battery	
Battery Type	Sealed Lead-acid
Built-in Charger	No
User-replaceable	Yes
Hot-swappable	Yes
Expansion Ready	Yes
Parallel Expansion (Max. Units)	8
Compatible UPS Models	RT33010KE, RT33015KE, RT33020KE, RT33025KE, RT33030KE
Physical	
Form Factor	Rackmount, Tower
Physical Size	
Dimensions (WxHxD) (mm.)	433 x 132 x 660
Weight (kg.)	78
Installed Rack Height (U)	3
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Certifications	
Certifications*	RCM

 $^{^{*}}$ Certifications may vary according to different regions. Visit www.cyberpower.com for more information. #All specifications are subject to change without notice.

