

BCA12N63/BCA20N125/BCA40N125/BCA100N125




### EXTERNAL BATTERY CABINET TO PROLONG RUNTIME


#### The battery cabinet ensures extended system runtime during power outages

Designed for data center and critical applications, the External Battery Cabinet (EBC) can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery cabinets come with hardwire terminal block to allow for adding multiple EBCs, and built-in DC-rated circuit breaker to provide overload protection. The sealed lead-acid batteries used within the EBCs are stable and safe, which ensure the power system's reliable performance.

#### SERIES FEATURES

- Sealed Lead-acid Batteries
- EBM Expansion Capability
- Metal Housing

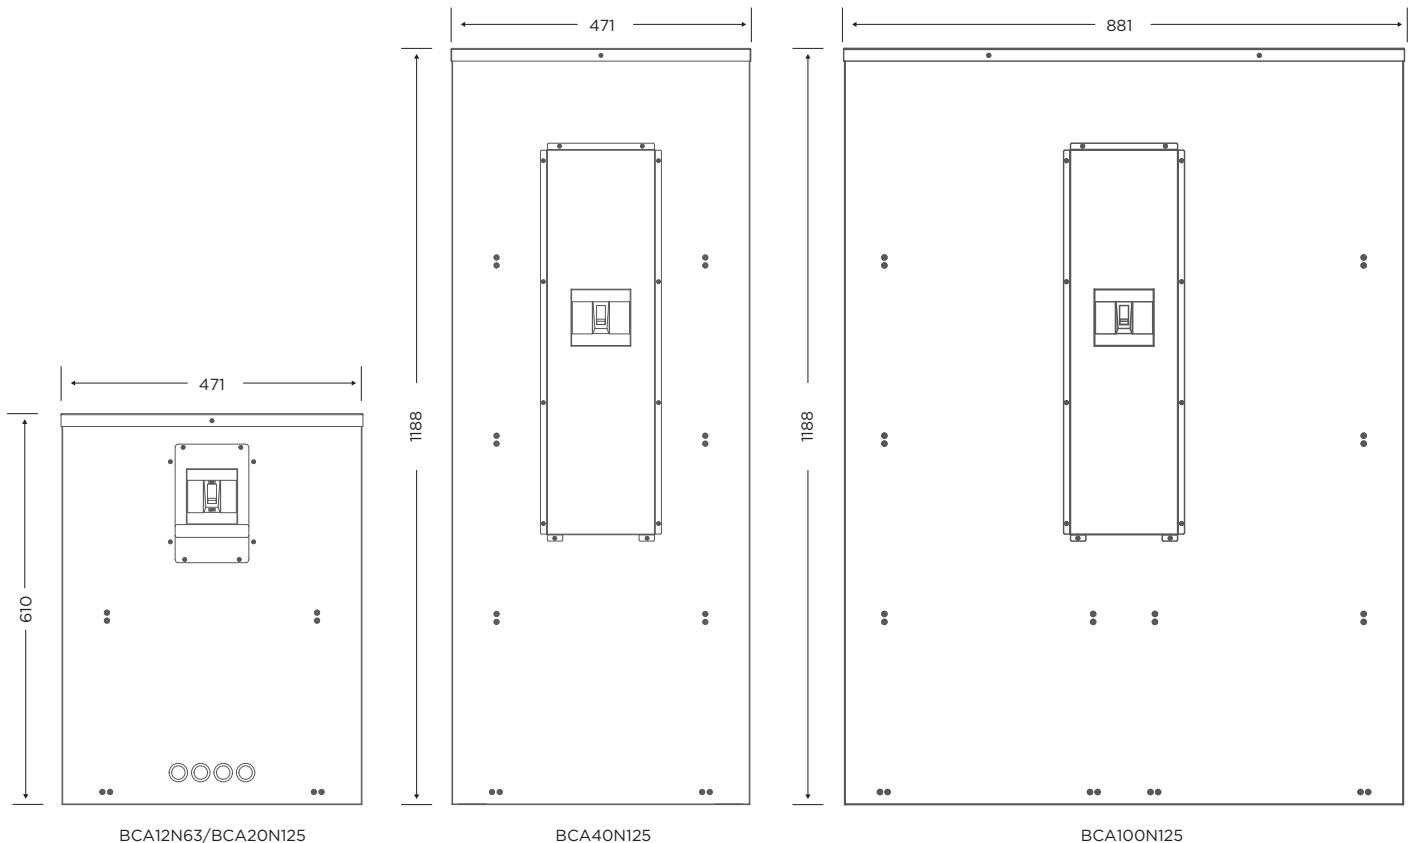

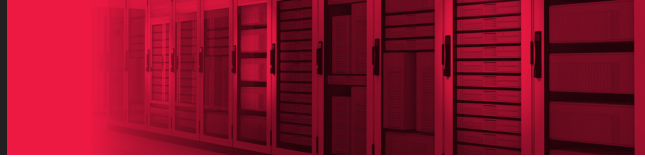

**TECHNICAL SPECIFICATIONS**

Model Name	BCA12N63	BCA20N125	BCA40N125	BCA100N125
<b>General</b>				
Nominal Output Voltage (Vdc)	480			
<b>Battery</b>				
Battery Type	Sealed Lead-acid			
Battery Quantity (pcs)	40			
Single Battery Voltage (V)	12			
Single Battery Capacity (AH)	12	20	40	100
Expansion Ready	Yes			
Compatible UPS	Modular UPS (3-Phase) Series, HSTP3T (3-Phase) Series			
<b>Physical</b>				
Form Factor	Tower			
<b>Physical Size</b>				
Dimensions (WxHxD) (mm.)	471 x 610 x 781	471 x 610 x 951	471 x 1188 x 951	881 x 1188 x 951
Weight (kg.)	27	32	60	98
<b>Environmental</b>				
Operating Temperature (°C)	0 - 40			
Operating Relative Humidity (Non-condensing) (%)	0 - 95			

#All specifications are subject to change without notice.